


WELLS SPRINGTM

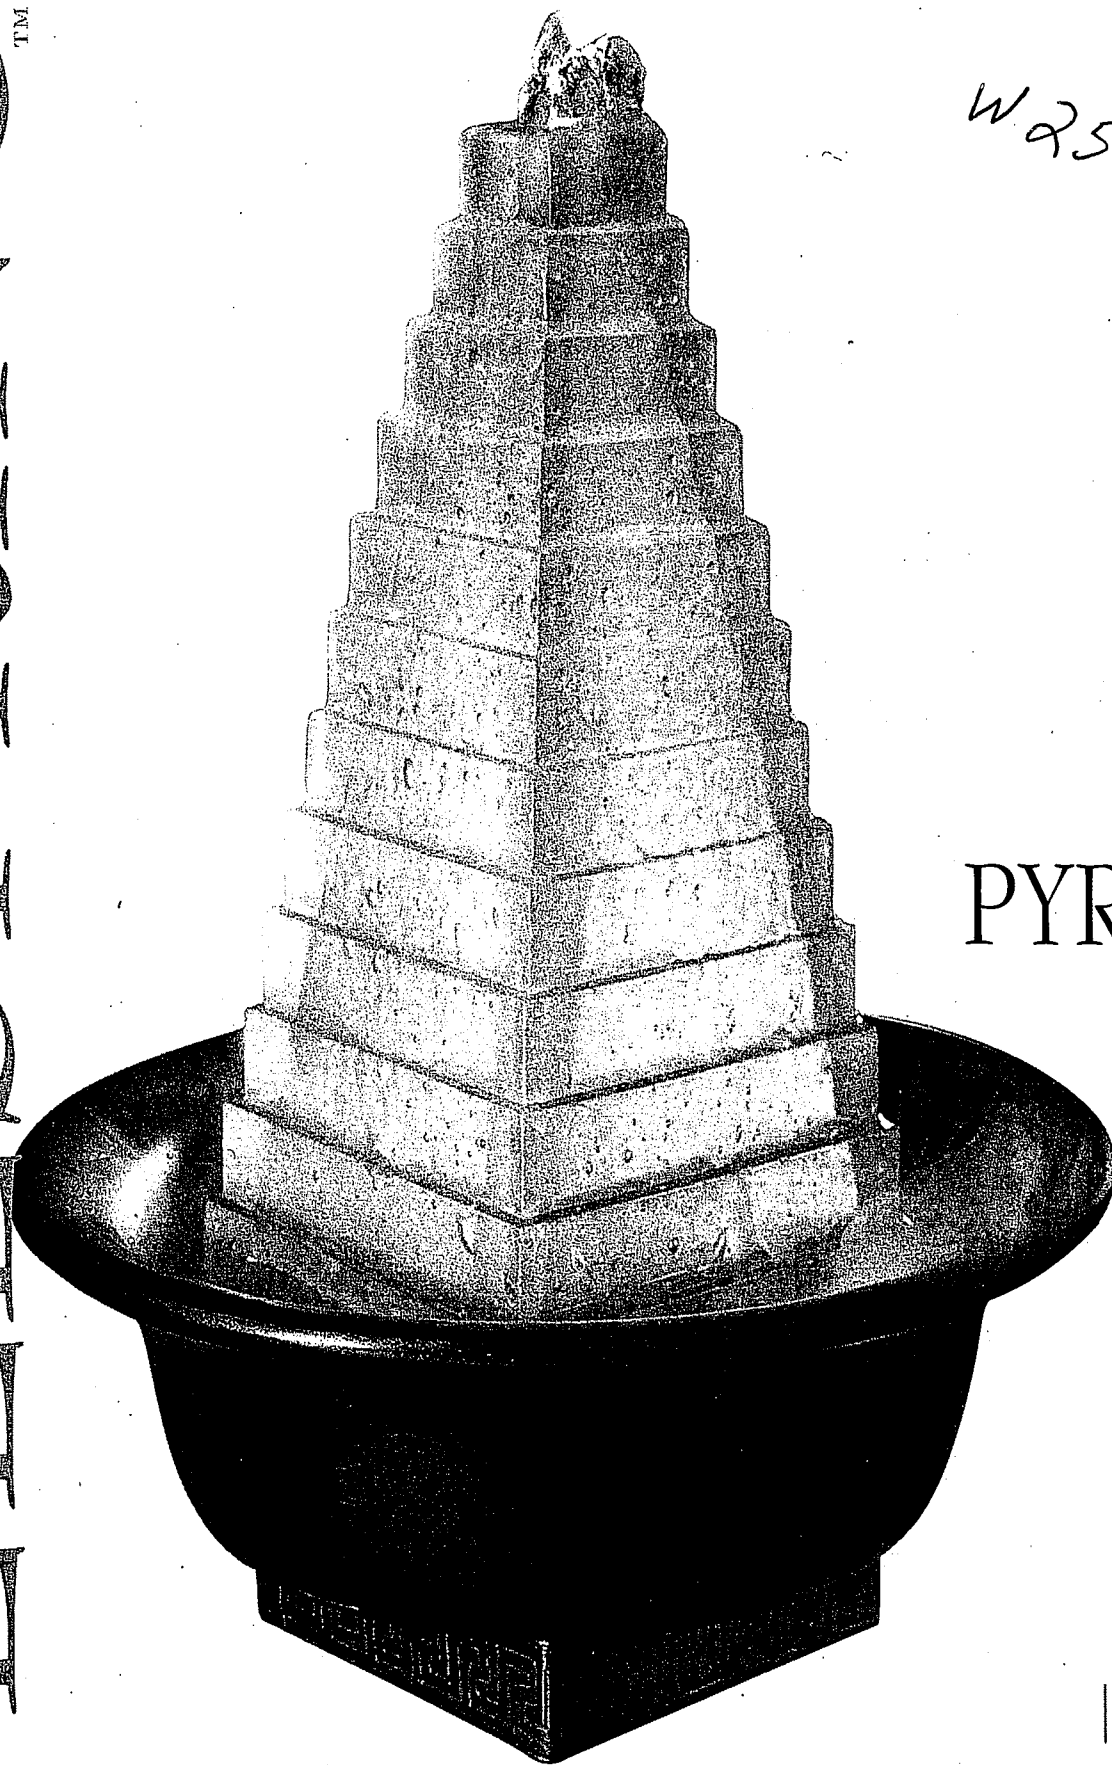

W2505

PYRAMID

Instruction
Manual

CONGRATULATIONS ON YOUR PURCHASE OF A WELLSPRINGTM TABLE SCULPTURE.

Professionally designed and tested, our sculptures will enhance your living space or work environment with a touch of added charm. The sight and sound of flowing water will also help enhance relaxation and improve concentration so you get the most out of your day or night, whether relaxing or working.

The messages in this booklet are important. You will find set up, use, and maintenance of your Wellspring table sculpture to be much easier and more enjoyable if you first thoroughly read and understand these instructions.

SAFETY TIPS

To reduce the risk of electric shock, fire, or property damage, please observe the following points.

1. WellspringTM table sculptures must be used only in the manner described in this manual. No attachments or accessories other than those provided by the manufacturer should be used with this product.
2. The electrical accessories provided with this product have been certified to be safe and reliable for household use under ordinary circumstances. However, the application of common sense and care in using them are still necessary to ensure maximum safety, reliability, and enjoyment.
3. Always unplug your table sculpture from the electrical outlet before assembling, adjusting, dismantling, or cleaning it.
4. Keep the product unplugged when not in use, when not under observation, or when hands or other body parts are being submerged in the table sculpture such as during set up, adjustment, or dismantling.
5. Before plugging in the table sculpture, always inspect all components for wear or other signs.

of damage. If wear or damage is found on any part, or the product has been dropped or operates abnormally; do not plug it in and do not use the product until it is repaired by a qualified technician.

6. Do not plug in the pump if any parts are found to be wet that should not be wet during ordinary use.

7. Make a "drip loop" on the pump cord by ensuring that at least a portion of the cord hangs below the height of the electrical outlet. This will help avoid water getting to the outlet or plug.

8. Wellspring™ table sculptures are not for outdoor use. Use only indoors with approved compatible household electrical equipment.

9. The table sculpture must be plugged into only electrical outlets that are compatible with the specifications listed on the pumps. Consult a qualified electrician if needed.

10. Children or disabled persons should use this product only under the direct supervision of adults.

11. Wellspring™ table sculptures should not be tampered with or adjusted in any manner other than described in this booklet. They have been designed, built, and tested with proven technologies to provide years of trouble-free enjoyment.

12. If there is difficulty in operating your table sculpture, please review these instructions to ensure that the sculpture has been properly set up and adjusted.

PUMP OPERATION TIPS

1. To turn the pump on, plug it in. As soon as the pump is plugged in, it will begin to operate. To turn the pump off, unplug it. The pump will stop as soon as it is unplugged.

2. During normal operation, on start up the pump may take up to several minutes to purge air out of its system.

3. Little or no water may flow, or water may flow erratically during the purging process. Pump operation may also be noisy initially. It is best to leave the pump alone until the purging is complete.

4. Once the air is purged from the pump, water will flow freely and the pump should operate almost silently. Occasional bursts of trapped air may cause some sputtering noises, but this will resolve quickly with continued operation.

5. If the height of the water flow is too high, or too much splashing is encountered; unplug the pump, adjust the flow-rate adjustment slider on the pump, and readjust/reassemble the sculpture as needed until the desired level

of operation is achieved. It may take several tries.

6. In some cases the pump will not operate if the flow-adjustment slider is moved to the extreme minimum ("") position. If this happens, adjust the slider such that water flows at a desired rate without shutting off the pump altogether.

7. To turn off the pump, unplug the plug from the electrical outlet. Re-starting the pump may require another period of purging, especially if the pump has not been used for some time.

8. Some water splash may be encountered during normal operation of the table sculpture. Splash may be corrected by following the directions in this manual. Please take care to properly adjust the pump such that as little or no splash is encountered. Damages arising from splash or spillage in the use of your Wellspring™ table fountain are not covered in the warranty, nor will be reimbursable by the manufacturer.

9. Operate the Wellspring™ only when the pump is fully submerged in cool fresh water only. Failure to do so will damage the pump, shorten the life of the pump, or make the pump difficult to operate. Such damage is not covered under warranty.

10. To clean the pump, rinse the intake vents to clear any debris when needed.

TROUBLESHOOTING

If you continue to experience problems in operating your table sculpture, please check the following points.

1. Ensure that there is sufficient water in the reservoir. There is sufficient water in the reservoir when the water level fully submerges the intakes on the pump.

2. Ensure that the pump has fully purged itself of air.

3. Make sure that the pump is properly connected to the upper portion of the sculpture and that it is firmly seated by its suction cup feet to the bottom of reservoir.

4. Adjust the flow-rate slider on the pump to permit enough water to flow through the pump.

5. Make sure that only clean water is used such that no debris block the pump's water intakes.

6. Make sure the pump is fully plugged into a functioning electrical outlet.


Do not return the product if you still experience difficulty after reviewing these instructions and troubleshooting.

Call Salton Customer Care at (800) 233-9054 for customized assistance. We're happy to help you get the most out of your Wellspring™ table sculpture.

PYRAMID Set Up

Please thoroughly review and understand these instructions before attempting to set up your table sculpture.

1. Locate a tabletop, desktop, or other flat surface that is suitable for placement of your table sculpture.




2. On the pump, locate the flow control lever on the pump's side. Set the flow-rate to maximum by moving the adjustment slider to the right-most (toward "+") position.

3. Moisten the suction cup feet of the pump and place the pump into the bottom of the reservoir. Ensure the pump stays in place by its suction cups.


4. Place the mist-maker into the cup molded into the bottom of the reservoir.

5. Clip the rubber stopper around the cords of both the pump and mist-maker. The larger hole is for the pump




- cord; the smaller hole is for the mist-maker cord. Leave enough cord slack for both the pump and mist-maker to permit convenient set up.

6. Apply a coat of petroleum jelly to threads of rubber stopper, then firmly push the stopper into the cord chimney. Critical: To prevent water leakage, apply a dry sealant to the base of the rubber stopper showing on the underside of the reservoir base once the stopper is seated in the cord chimney. When removing the stopper (such as when adjusting cord slack), push the stopper out through the cord chimney. Never grasp and pull the electrical cords.

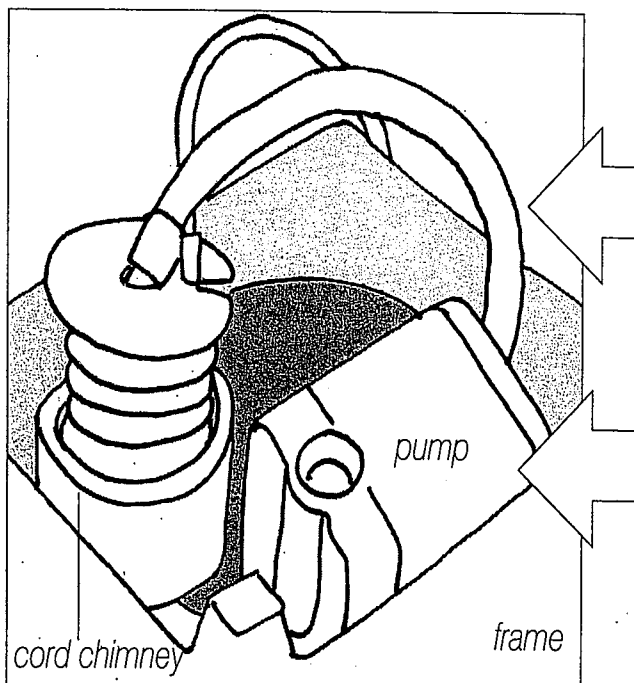


7. Insert the frame stand into the bottom of the reservoir. The frame stand is inserted properly when the side with the two prongs faces upward, and the frame stands sits flush and stable inside the reservoir.

WELLS

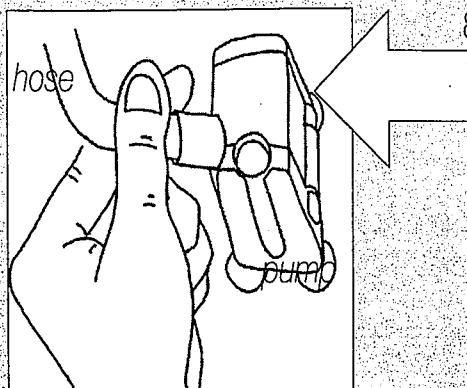

8. Holding the Pyramid top slightly above the frame stand, connect the rubber hose hanging from the bottom of the Pyramid top to the pump outlet. Tip: Insert your flattened hand in the space between the Pyramid top and frame stand. Using two fingers to grasp the bottom of the hose, guide the hose into the pump outlet. Adjust the position of the pump as needed.

9. Mate the Pyramid top to the square base frame at the bottom of the reservoir, making sure the pump and rubber hose do not become separated.

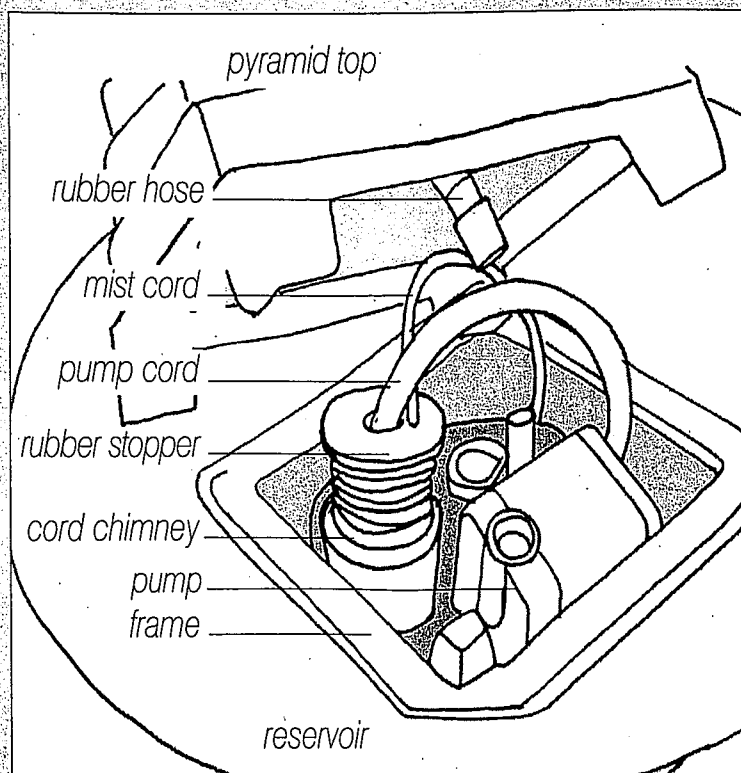

10. Run excess cord slack through the groove located underneath the base of the reservoir. The table sculpture should sit level with the surface on which it is placed. If not, adjust the cords until they are completely tucked in the groove.

11. Fill the reservoir with cool, clean, fresh water making sure that the pump intakes and crossbeam at the top of mist-maker are completely submerged, about 2" depth. Distilled water is recommended, since mineral build-up from tap water may shorten the life of your table sculpture.

12. Connect the mist-maker cord to the AC-adaptor. Then plug both the pump and mist-maker into approved household electrical outlets, being sure to observe the safety tips discussed in this manual.

13. As soon as the pump and mist-maker are plugged in, the pump will begin to operate and the mist-maker will produce vapor. To operate and adjust the flow of the pump, see the section on pump operation tips.

Please also refer to the enclosed leaflet for additional information regarding use and care of the mist-maker.

PRINTING

MIST MAKER UNIT INSTRUCTIONS

This unit operates by vibrating water at such high frequencies that liquid water becomes vaporous. Besides the soothing sight of mist and humidifying benefits, the mist maker generates negative ions, which have been reported to provide additional relaxation benefits. Enjoy aromatherapeutic benefits by adding a few drops of your favorite essential oil to the water.

SAFETY INSTRUCTIONS, READ BEFORE INITIAL OPERATION

1. Use indoors only. Do not use outdoors.
2. Use only the accessories provided with this unit. Do not use with any other accessories.
3. Do not touch the unit's ceramic disc while in operation.
4. Do not operate the unit out of water.
5. Always disconnect the power supply when disassembling it for maintenance.
6. Do not allow the unit's electrical plug or adaptor to come into contact with water.
7. Do not allow the unit's adaptor plug connector to get wet.
8. Ensure that the unit is constantly immersed in water while in use. Do not allow the mist maker to become trapped underneath objects.

INSTRUCTIONS FOR USE

1. Handle the mist maker unit with care. Ensure that there is always at least 1 1/2 inches of water above the unit's ceramic. Little or no mist may be produced if the unit is immersed in too much water. The black cross-beam on the unit must always be completely covered by water in order for the unit to operate properly.
2. Connect the electrical cord leading from the mist maker unit to the electrical cord leading from the adaptor.
3. Plug in the unit into approved household electrical outlets only. A red indicator on the mist maker lights when the unit is on. The mist maker will immediately produce vapor once the mist maker is installed properly according to the directions above.

GENERAL SUGGESTIONS FOR OPTIMUM USE

1. Do not operate the unit continuously for more than 8 hours per day.
2. Small jets of water will erupt during normal operation of the mist maker. Adjust the set-up and location of your table sculpture so as to minimize property damage or personal injury. Do not place the unit where water spillage or condensation will cause damage to furniture, create electrical shock hazards, or cause slippery floors or other injury risks.
3. Use with clean distilled water is strongly recommended. Mineral deposits and debris from tap water or other sources may damage or diminish the performance of the mist maker.
4. Clean the unit by wiping with a clean cloth dampened in distilled water. Use no abrasives, cleansers, solvents, or other chemicals to clean the product.

MAINTANANCE & CERAMIC REPLACEMENT

PLEASE NOTE-CERAMIC REPLACEMENT KIT SOLD SEPARATELY

1. The performance of the mist maker may diminish after prolonged use. Cleaning or replacing the ceramic assembly will help restore the unit's performance.
 - a. Be sure the unit is unplugged and completely dry.
 - b. Loosen the ceramic assembly by using the key tool to loosen the grommet of the assembly.
 - c. Remove the inner components of the ceramic assembly.
 - d. Clean any deposits on the ceramic with a soft cloth. Re-install the assembly after cleaning or replacing by following the above steps in reverse. Be certain the inside of the ceramic cavity is completely dry before reinstalling the parts.
- IMPORTANT: There is a correct front and back side to the ceramic. Be sure to reinstall the assembly with the black ring of the ceramic facing down towards the base of the mist maker unit.



ONE-YEAR LIMITED WARRANTY

This Jonal, a Division of Salton, Inc., product warranty extends to the original consumer purchaser of the product.

Warranty Duration: This product is warranted to the original consumer purchaser for a period of one (1) year from the original purchase date.

Warranty Coverage: This product is warranted against defective materials or workmanship. This warranty is void if the product has been damaged by accident, in shipment, unreasonable use, misuse, neglect, improper service, commercial use, repairs by unauthorized personnel, or other causes not arising out of defects in materials or workmanship. This warranty is effective only if the product is purchased and operated in the USA, and does not extend to any units which have been used in violation of written instructions furnished by Jonal, a Division of Salton, Inc., or to units which have been altered or modified or to damage to products or parts thereof which have had the serial number or other product identifying information removed, altered, defaced, or rendered illegible.

Warranty Disclaimers: This warranty is in lieu of all other warranties expressed or implied and no representative or person is authorized to assume for Jonal, a Division of Salton, Inc., any other liability in connection with the sale of our products. There shall be no claims for defects or failure of performance or product failure under any theory of tort, contract, or commercial law including, but not limited to, negligence, gross negligence, strict liability, breach of warranty, and breach of contract.

Warranty Performance: During the above one-year warranty period, a product with a defect will be either repaired or replaced with a reconditioned comparable model at the option of Jonal, a Division of Salton, Inc., when the product is returned to the Jonal, a Division of Salton, Inc., facility. The repaired or replacement product will be in warranty for the balance of the one-year warranty period and an additional one-month period. No charge will be made for such repair or replacement.

Service and Repair

Should the product malfunction, you should first call toll-free 1-800-233-9054 between the hours of 9:00 am and 5:00 pm Central Standard Time and ask for CONSUMER CUSTOMER SERVICE stating that you are consumer with a problem.

In-Warranty Service: For a product covered under the warranty period, no charge is made for service or postage. Call for pre-paid return mailing label. (U.S. Customers Only).

Out-of-Warranty Service: A flat-rate charge by model is made for out-of-warranty service. Include \$6.00 for return shipping and handling.

Jonal, a Division of Salton, Inc., cannot assume responsibility for loss or damage during incoming shipment. For your protection, carefully package the product for shipment and insure it with the carrier. Be sure to enclose the following items with your product: any accessories related to your problem; your full return address and daytime phone number; a note describing the problem you experienced; a **copy of your sales receipt or other proof of purchase** to determine warranty status. C.O.D. shipments cannot be accepted.

Return the product to:

ATTN.: Repair Department
Jonal, a Division of Salton, Inc.
550 Business Center Drive
Mt. Prospect, Illinois 60056

Distributed by Block China and Crystal

JONAL[®]

a Division of Salton, Inc.




SUBMERSIBLE PUMP

OWNER'S MANUAL

■ INTRODUCTION

JONAL[®] pumps are carefully inspected and tested to insure both safety and operating performance. However, failure to follow the instructions and warnings in this manual may result in pump damage and/or serious injury. Be sure to read and save this manual for future reference.

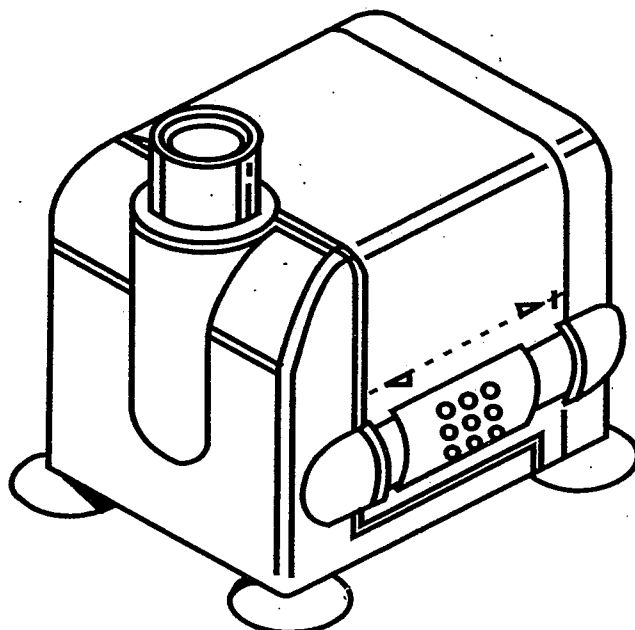

■ WARNING

- This pump is supplied with a grounding conductor and a grounding type attachment plug . To reduce risk of electric shock , connect only to a properly grounded outlet.
- Do not remove the grounding pin from the plug.
- Do not connect to any voltage other than that shown on the pump.
- Do not pump flammable liquids.
- The National Electric Code requires that a ground fault circuit interrupter (GFCI) be used in the branch circuit supplying fountain pumps and other pond equipment . See your electrical supplies dealer for this device.
- To reduce the risk of electrical shock , use only on portable self-contained fountains no larger than 5 feet in any dimension .
- Do not use with water above 30°C.

■ CAUTION

Always disconnect from electrical outlet before handling the pump .

Do not let the pump run dry.

Do not lift the pump by the power cord .

Do not pump heated liquids .

Operate in freshwater only .

Operate pump completely submerged for proper cooling.

For indoor use only .

■ PERFORMANCE

A clogged or dirty intake screen will greatly reduce performance . If the pump is used on a dirty surface , raise it slightly to reduce the amount of debris contacting the intake . If less flow is desired , adjust the flow control lever on the side of the pump or restrict the discharge flow.




■ MAINTENANCE

To clean the pump , remove the front plate and the impeller . Use a small brush or stream of water to remove any debris

CAUTION : The pump shaft can not be removed . **IF THE PUMP FAILS TO OPERATE , CHECK THE FOLLOWING :**

- Check the circuit breaker and try another outlet to ensure the pump is getting electrical power . **NOTE :** Always disconnect from electrical outlet before handling the pump .
 - Check the pump discharge and tubing for kinks and obstructions . Algae buildup can be flushed out with a garden hose .
 - Check the inlet screen to ensure it is not clogged with debris .
 - Remove the pump inlet to access the impeller area. Turn the rotor to ensure it is not broken or jammed .
 - Monthly maintenance will add to your pump's life .
- NOTE :** Ensure that the electrical cord loops below the electrical outlet to form a "Drip Loop " This will prevent water from running down the cord into the electrical outlet .

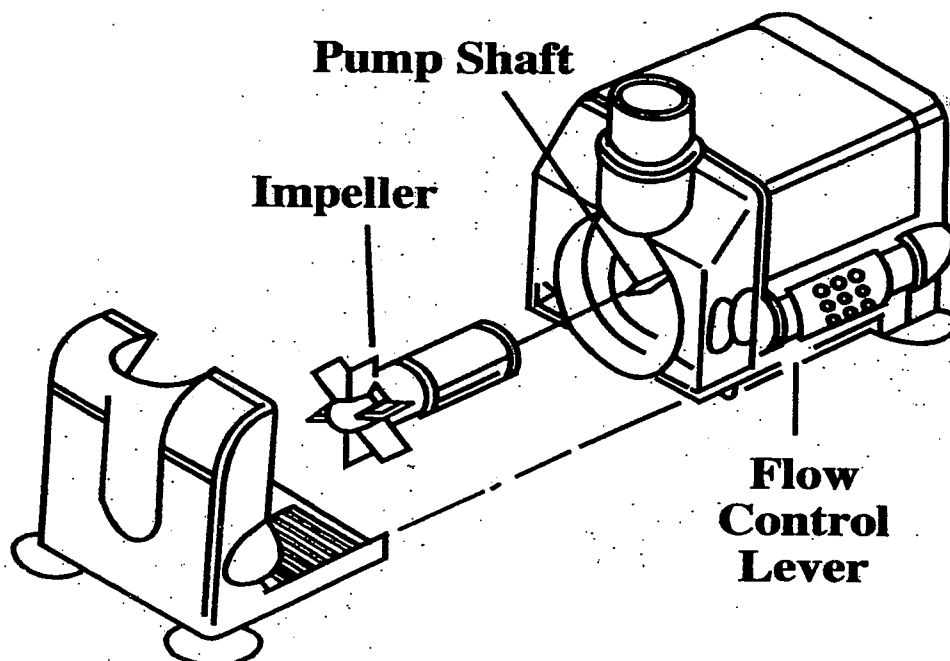

LIMITED WARRANTY

This product is warranted for one year from the date of purchase.

Please see the enclosed insert for your specific rights and obligations under the warranty terms.

Return of product for repair or replacement under warranty must be sent to:

**ATTN: Repair Department
Jonal, a Division of Salton, Inc.
550 Prospect Center Drive
Mt. Prospect, Illinois 60056**

Refer to the enclosed leaflet for warranty return instructions.

JONAL®

a Division of Salton, Inc.

**Distributed by:
Block China and Crystal
41 Madison Avenue
New York, NY 10010**