


Relaxor®

Stereo Sound Therapy

AM/FM STEREO ALARM CLOCK WITH REMOTE

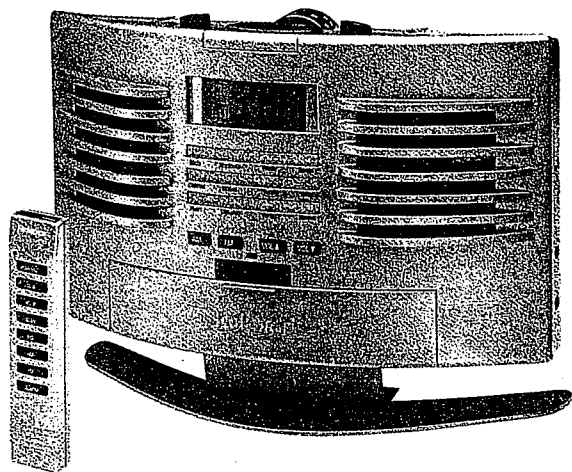

Unique Remote Feature
Easily stores in front compartment



Song Birds

birds



Night Moves

nocturnal



Whale Dance

whale



Autumn Breeze

breeze



Wind Chimes

chimes



Rolling Waves

waves



Desert Thunder

thunder



Spring Shower

rain



Heartbeat

heart



White Noise

diffusion



Mountain Melody

forest



Stream Lullaby

stream

**Model
722**

OWNERS MANUAL and OPERATING INSTRUCTIONS

Dear Customer:

Thank you for purchasing the **Relaxor** Stereo Sound Therapy with remote.

The Stereo Sound Therapy is an environmental sound conditioning system with unique sound mixing features. The twelve sound environments can be individually selected in stereo or mixed in pairs to provide an array of listening environments. Left/Right volume controls allow for the perfect mixing.

The remote control gives the user complete system control and sound selection and mixing capabilities from any relaxing position. In addition, its full clock features can be combined with any selected nature sound or its AM/FM radio to give the user a comforting wake up or a gentle sleeping environment.

In order to enhance your enjoyment and maximize the benefits of your new purchase, please take a few moments to read the following instructions.

We know you will enjoy your new Stereo Sound Therapy by **Relaxor**.

IMPORTANT SAFETY INSTRUCTIONS

Read all instructions before using the **Stereo Sound Therapy with Alarm Clock**.

DANGER!

To reduce risk of electric shock:

1. Do not reach for a product that has fallen into water. Unplug immediately.
2. Do not use while bathing or in a shower.

WARNING!

To reduce risk of burns, fire, electric shock, or injury to persons:

1. Unplug from outlet before putting on or taking off parts.
2. Use this product only for its intended use as described in this manual. Do not use attachments not recommended by the manufacturer.
3. Never operate the Stereo Sound Therapy product if it has a damaged cord or plug, if it is not working properly, if it has been dropped or damaged, or dropped into water. Contact your dealer for instructions on returning it for examination and repair.
4. Close supervision is necessary when this appliance is used by, on, or near children or disabled persons.
5. Do not use outdoors.
6. Keep the cord away from heated surfaces.
7. Do not operate where aerosol (spray) products are being used or where oxygen is being administered.
8. If you are under a physician's care and/or have a condition requiring the use of any medical device, please consult your health care provider prior to using this product.

**OPERATE
YOUR
SYSTEM
ACCORDING
TO THIS
MANUAL**

**USE ONLY
THE POWER
DEVICE
SUPPLIED**

MAINTENANCE INSTRUCTIONS:

No user maintenance of this product is required. If the System does not function, be sure...

- (a) The adaptor is plugged into an electrical outlet.
- (b) The Adaptor cord is plugged into, and fully engaged, in its receptacle.
- (c) When using without adaptor check batteries or battery compartment to see if contact is correct (+/-) or not.

If there is a malfunction of any kind, contact your dealer for instructions on returning it for examination and repair.


CAUTION

Do not open batteries, dispose of in fire, install in unit backwards, mix with other battery types, or short circuit. To do so, may cause them to leak or explode resulting in personal injury and property damage.


SAVE THESE INSTRUCTIONS!

Relaxor®

How To Operate Your Relaxor® Stereo Sound Therapy

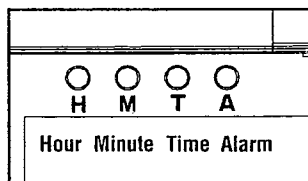

Inside front compartment

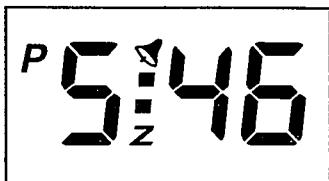

SETTING THE TIME:

Note: The time set and alarm set buttons are located inside the remote control storage compartment area.

To set the time, press and hold the Time "T" button. While holding the Time "T" button, press the Hour "H" button until you reach the correct hour.

Continue to hold the Time "T" button and press the Minute "M" button until you reach the correct minute.

Note: The LCD clock displays the time in standard AM/PM mode. The letter "P" will appear in the upper left hand corner of the display, indicating "PM". It will not show during "AM" time. Use it for correct setting of clock and alarm time. The LCD clock display will light up when the AC adaptor is used.

SETTING THE ALARM:

Note: The letter "P" will appear in the upper left hand corner of the clock display, indicating "PM".

To set the alarm, press and hold the "A" button. While holding the "A" button, press "H" button until you reach the desired hour. Continue to hold the "A" button and press the "M" button until you have reached the desired minute.

LISTENING TO NATURE SOUNDS:

Note: The green light on front panel of unit will indicate the selected sound.

Note: See Fig.1 and 2 for reference on next page

1. TO TURN UNIT ON:

When operating the unit: Press the **SNOOZE** button on the unit.

When operating the remote control: Press the **PWR/SNZ** button.

2. TO SELECT ONE OF THE 12 SOOTHING NATURE SOUNDS:

When operating the unit: Press the **SOUND SCAN** button and select the sound of your choice.

When operating the remote control: Press the **SCAN** button to select the sound.

3. ADJUST THE TIME SETTING

Switch to desired listening time: 30, 60 or 90 minutes. Slide the timer switch to **CONTINUOUS** for continuous play.

When the timer switch is on **CONTINUOUS**, the sound can be turned off manually by pressing:

When operating the unit: Press the **SNOOZE** button.

When operating remote control: Press the **PWR/SNZ** button.


4. ADJUST THE VOLUME AS DESIRED:

There are two speakers provided, left and right. Each speaker is controlled by its Volume control. The left speaker has a volume up and volume down control button. Similarly, right speaker has a volume up and volume down control button. This Arrangement provides better ability for user customization.

When operating the unit: Press the "**Volume Up**" button on both left side and right side to increase the volume and press "**Volume Down**" on both left side and right side to decrease the volume.

When operating the remote control: Press "**Volume Up**" button on left side and right side to increase the volume and press "**Volume Down**" on left side and right side to decrease the volume.

The dual control is particularly interesting when mixing the sounds of choice. Mixing of sounds is achieved by channeling each sound through an individual speaker. Therefore, one could increase or decrease the volume of one of the selected sounds to create the desired sound effect.

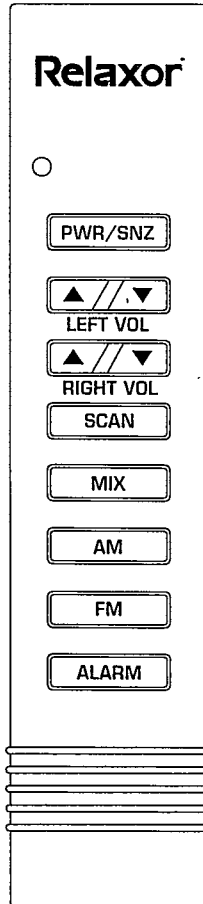

Relaxor®

How To Operate Your Relaxor® Stereo Sound Therapy

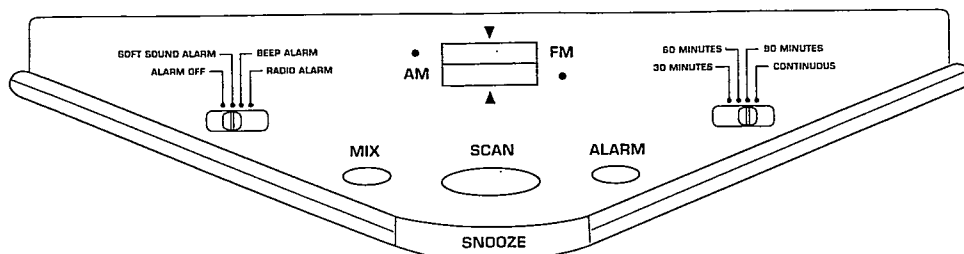


Fig.1

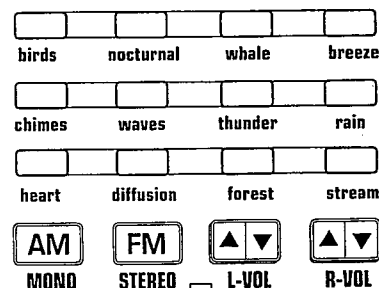


Fig.2

MIXING ANY TWO SOUNDS:

Note: It is recommended that the speakers be adjusted to an even balanced volume for normal use.

TO MIX TWO SOOTHING NATURE SOUNDS:

1. Select the first nature sound:

When operating the unit: Press the **SCAN** button and select the first sound and then press the **MIX** button located on top of the unit.

When operating the remote control: Press the **SCAN** button and select the first sound and then press the **MIX** button.

2. TO SELECT THE SECOND NATURE SOUND:

When operating the unit: Press the **SCAN** button and select the second sound and then press the **MIX** button. You will now hear the mixed sounds.

When operating the remote control: Press the **SCAN** button and select the second sound and then press the **MIX** button. You will now hear the mixed sounds.

Note: When the sounds are mixed, you will see two green lights, each representing the selected sounds. Also, the primary sound cannot be chosen twice

3. Adjust the time setting switch to desired listening time: 30, 60 or 90 minutes. Slide the timer switch to **CONTINUOUS** for continuous play.

When the timer switch is on **CONTINUOUS**, the sound can be turned off manually by pressing:

When operating the unit: Press the **SNOOZE** button.

When operating remote control: Press **PWR/SNZ**.

4. Adjust the volume as desired.

TO DELETE MIXED SOUNDS:

5. When you are finished listening:

When operating the unit: Press the **SNOOZE** button.

When operating remote control: Press the **PWR/SNZ** button.

When operating the unit: Press the **MIX** button and the last sound that was selected will be deleted. The previous selected sound will remain on.

When operating the remote control: Press the **MIX** button and the last sound that was selected will be deleted. The previous selected sound will remain on.

LISTENING TO THE RADIO:

1. For listening to **AM/FM** radio:

When operating the unit: Press the **SNOOZE** button. Press **AM** or **FM**.

When operating the remote control: Press the **PWR/SNZ** button. Press **AM** or **FM**.

2. Turn the tuning wheel on top of unit for selected **AM/FM** stations.

3. Adjust the time setting switch to desired listening time: 30, 60 or 90 minutes. Slide the timer switch to **CONTINUOUS** for continuous play.

When the timer switch is on **CONTINUOUS**, the radio can be turned off manually by pressing:

When operating the unit: Press the **SNOOZE** button.

When operating remote control: Press **PWR/SNZ**.

(See back page for further instructions)

Relaxor®

How To Operate Your Relaxor® Stereo Sound Therapy

Parts List:

One Stereo Sound Therapy unit
One Remote Control with batteries
(Remove insulating tape before operating)
One Detachable Base
One AAA battery for clock
One Wall Mounting Guide & Instructions
One Power Adaptor

For AC Power Use

Connect the receptacle end of the adaptor to the side of the unit marked DC 6V and insert the plug into an electrical outlet.

For Battery Use

1. Battery Insertion For Unit:


To install batteries, remove battery compartment panel on back of unit by pushing down on both latches. Insert 4 C batteries (not included) with the (+) and (-) marks correctly aligned according to diagram shown inside the compartment.

2. Battery Insertion For Clock:

To install one AAA battery (included), open the battery compartment panel on back of unit. Use a phillips screwdriver to remove the inner battery compartment. Insert battery in the proper positive (+) and negative (-) positions according to diagram inside the compartment. After inserting this battery, set clock and alarm.



3. Battery Replacement For Remote Control:

Remove battery compartment in back of unit. Insert batteries according to diagram inside the compartment.

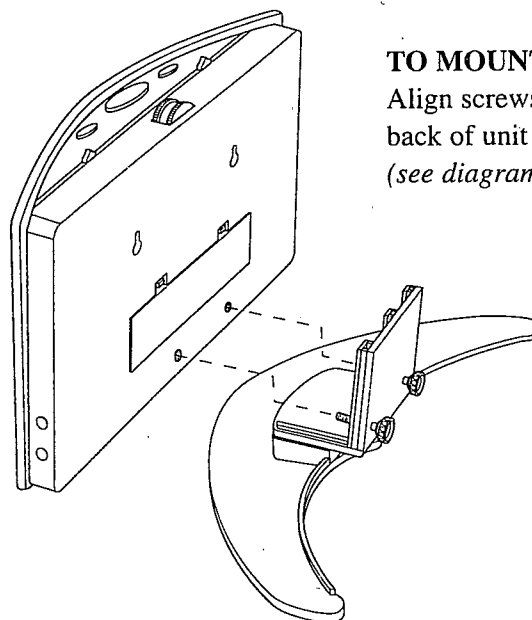




TO MOUNT BASE

Align screws to holes in back of unit and tighten.
(see diagram)

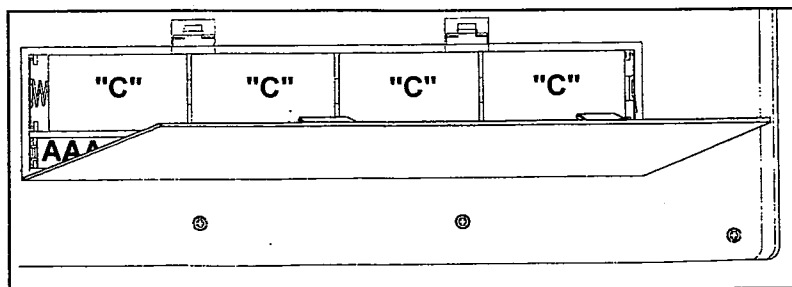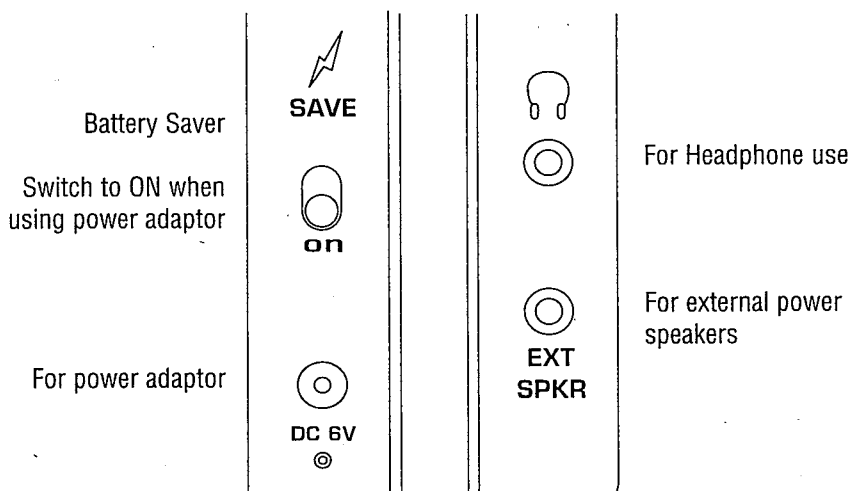

Note: One AAA battery is required at all times to operate the clock. An AAA alkaline battery should last, on the average, one year.

Stereo Sound Therapy Reference Guide

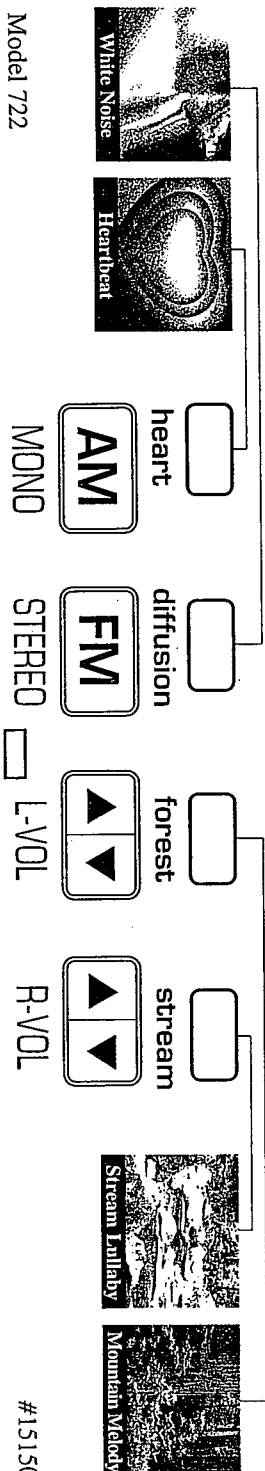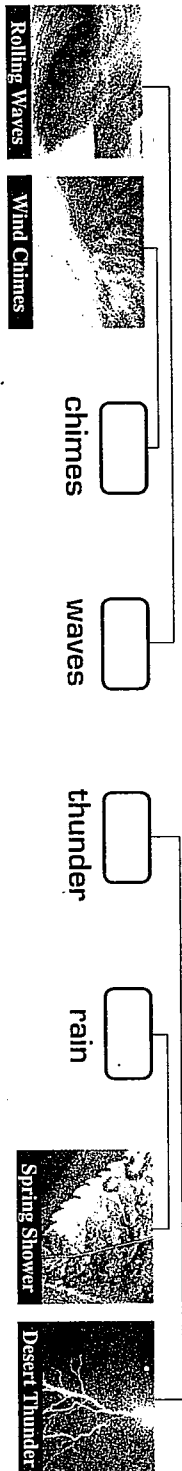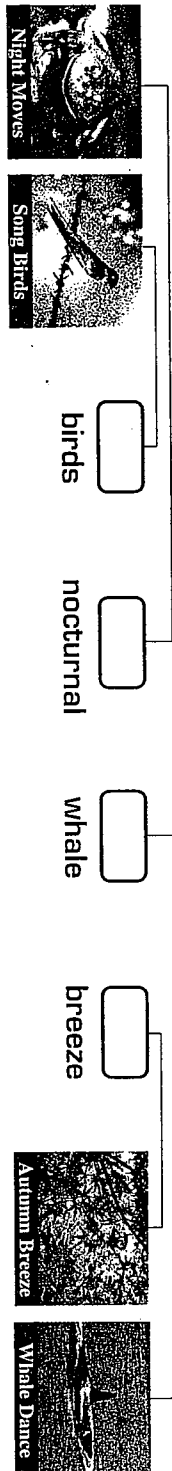

Relaxor
The Leader in Relaxation™

Model 722

MONO ☐ AM

STEREO ☐ FM


L-VOL ☐

R-VOL ☐

#15150

Relaxor MODEL 722 WALL MOUNT GUIDE

To mount product no.722 to a wall: Use this paper template to mark hole locations for inserting plastic anchors or other hardware; Use a pencil or pen to punch through the target lines intersection to mark the wall; Drill wall; Use no.8 screws with anchors if required and mount your Relaxor no.722 by sliding over screw heads in slots provided in back of cabinet. Note: Please be sure to remove base prior to mounting

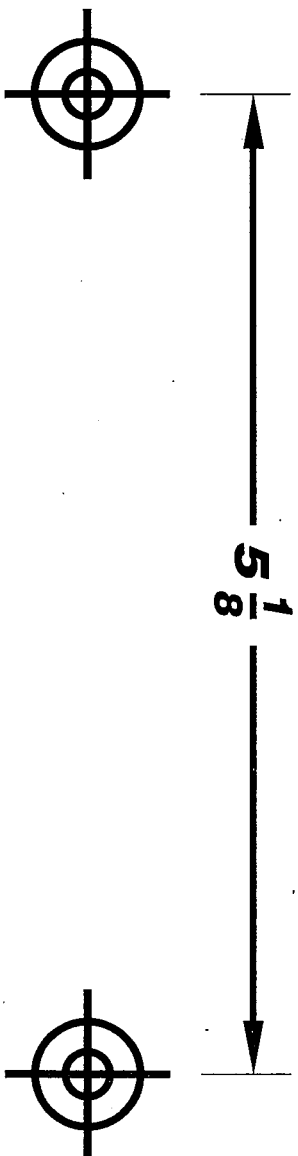

Relaxor®

How To Operate Your Relaxor® Stereo Sound Therapy

TO AWAKE TO NATURE SOOTHING SOUNDS

1. Turn the unit on by pressing:
When operating unit: Press the **SNOOZE** button.
When operating the remote control: Press the **PWR/SNZ** button.
2. Select the sound of your choice (refer to "Listening to Nature Soothing Sounds" Above for operating single or mixed sounds).
3. Turn the unit off again by pressing:
When operating unit: Press the **SNOOZE** button.
When operating the remote control: Press the **PWR/SNZ** button.
4. Slide the Awake function switch on top of unit to **SOOTHING SOUND ALARM**. The alarm symbol (bell) will appear on the clock face when the alarm is activated.
5. When the alarm sounds, slide the Awake function switch to one of the following:
ALARM on unit for the next alarm set time
ALARM on remote control for the next alarm set time
ALARM OFF to turn the alarm off.

Note: The soft sound alarm will go on for approximately 15 seconds and off 20 seconds. It will go on again for 20 seconds and off for 20 seconds. The soft sound alarm will then stay on continuously.

TO AWAKE TO RADIO

1. Turn the unit on by pressing:
When operating unit: Press the **SNOOZE** button.
Press **AM** or **FM**.
When operating the remote control:
Press the **PWR/SNZ** button. Press **AM** or **FM**.
2. Turn the tuning wheel to the selected **AM/FM** station of your choice.
3. Turn the unit off again by pressing:
When operating unit: Press the **SNOOZE** button.
When operating the remote control: Press the **PWR/SNZ** button.
4. Slide the Awake function switch on top of unit to **RADIO ALARM**.

The alarm symbol (bell) will appear on the clock face when the alarm is activated.

5. When the alarm sounds, slide the Awake function switch to one of the following:
(A) **ALARM** on unit for the next alarm set time
(B) **ALARM** on remote control for the next alarm set time
(C) **ALARM OFF** to turn the alarm off.

TO AWAKE TO BEEP ALARM

1. Slide the Awake function switch on top of unit to **BEEP ALARM**. The alarm symbol (bell) will appear on the clock face when the alarm is activated.
2. When the beeper comes on, slide the Awake function switch to one of the following:
(A) **ALARM** on unit for the next alarm set time
(B) **ALARM** on remote control for the next alarm set time
(C) **ALARM OFF** to turn the alarm off.

SNOOZE

TO ACTIVATE THE SNOOZE FEATURE:

When operating the unit: Press the **SNOOZE** button located on top of unit.

When operating the remote control: Press **PWR/SNZ**.

This will give you an extra 8 minutes of sleep time before the alarm sound again. The **SNOOZE** feature can be used repeatedly to extend your sleep time. To deactivate the **SNOOZE** feature, switch to one of the following:

- (A) **ALARM** on unit for the next alarm set time
- (B) **ALARM** on remote control for the next alarm set time
- (C) **ALARM OFF** to turn the alarm off

MOUNTING UNIT TO THE WALL

To mount unit to the wall, remove from the base and mount the unit using the screws, plastic anchors and mounting guide that are enclosed.

Relaxor®

The Leader in Relaxation™

Stereo Sound
Therapy
with Alarm Clock

*Relax
and
Enjoy!*

Limited One Year Warranty

If your **SOUND & LIGHT THERAPY** does not operate properly, or you need assistance for any reason, call: Customer Service - JB Research, Inc. Los Angeles Corporate Office • Bellflower, CA

1-800-RELAXOR

Outside U.S. write to: Customer Service
9062 Rosecrans Ave. Bellflower, CA 90706
© Copyright 1998 JB Research, Inc.

PATENTS PENDING



(Adaptor)