


Stiffel Smart Lamp Instructions



Control Box on lamp

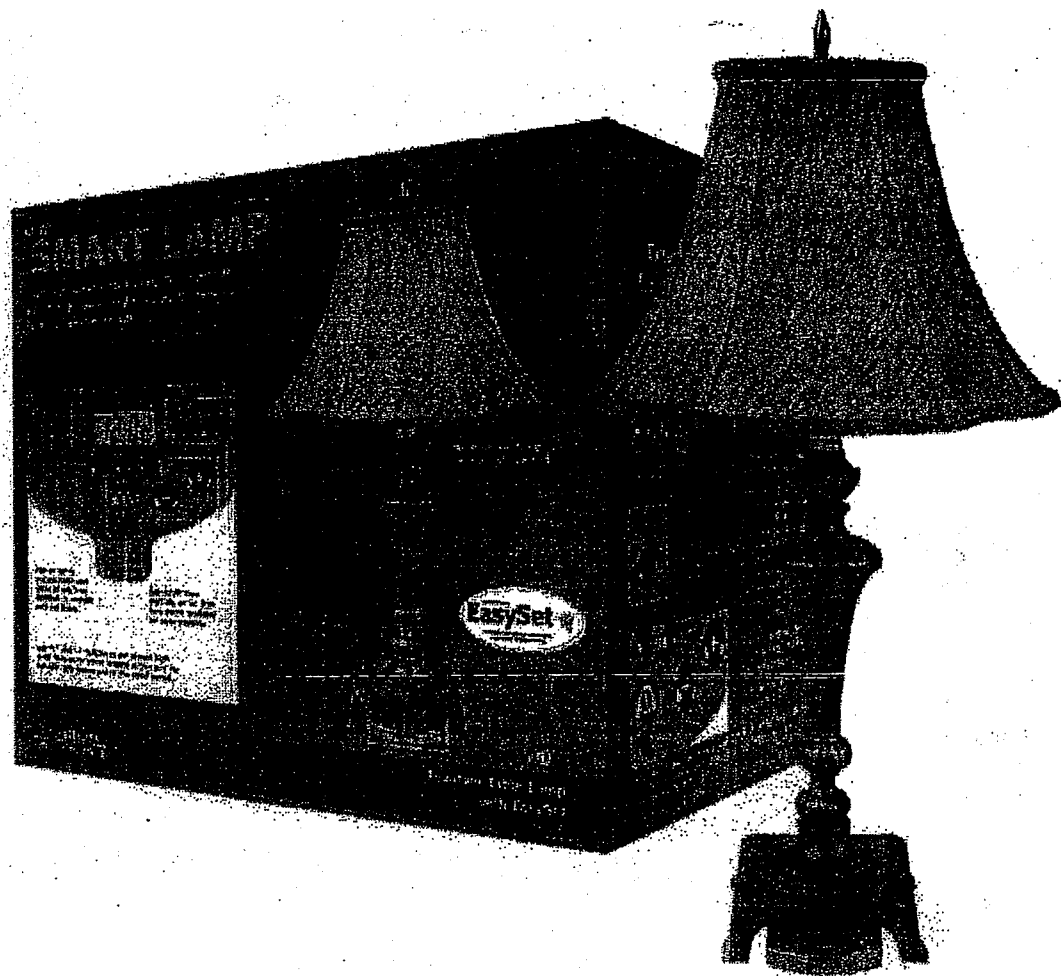

Using EasySet

A. POWER

- 1) If the unit is in "standby" mode, the lamp will turn on to preset level when "POWER" is pressed. If pressed again within about 2 seconds, the lamp will be at maximum intensity.
- 2) If the unit is in "on" mode, pressing "POWER" will trigger soft off; the lamp will gradually dim over a maximum of one minute (the duration will be related to the brightness level of the lamp). If pressed again within about 2 seconds, the lamp will turn off immediately and return to "standby" mode. Soft off can be stopped by pressing "+" and "POWER" (two seconds after the "POWER" button being first pressed).

B. DIMMER + / -

- 1) Press buttons in small increments to increase or decrease light level discreetly. Hold buttons down to increase or decrease the brightness continuously.
- 2) When "+" pressed in "standby" mode, the lamp will turn on at minimum intensity.

C. SET PRESET LEVEL

- 1) Use the Dimmer "+" and "-" buttons to find your desired light level. Then press the "PRESET" button.

The next time you turn on your lamp with the "POWER" button, the light will go on to the preset level. Push the "POWER" button again within two seconds and the light will go to full brightness.

D. SET THE TIME


- 1) Press and hold the "SET" button when displaying normal current time, and you will enter "set current time" mode. The time should flash to signify it is ready to be set.
- 2) Press "HOUR" incrementally during "set current time" until you reach the hour of the current time.
- 3) Press "MIN" incrementally during "setting current time" mode until you reach the desired minutes of the current time.
- 4) Press "SET" when in "set current time" mode to confirm and activate the clock time.

G. TIMER ON / OFF

"Timer on" and "timer off" must be set together; user must activate both "timer on" and "timer off".

- 1) When pressed, LCD will display as the following sequence:
...-> timer on time -> timer off time -> current time -> ...

G. TIMER ON / OFF (continued)

- 2) "Timer on" is indicated by a flashing clock with rays at the top as shown here... 
- 3) When displaying "timer on" time the time can be set by pressing "HOUR" and "MINUTE".
- 4) Press "SET" or "TIMER" to confirm the "timer on" time. The LCD should show the next screen - "timer off" time.
- 5) "Timer off" is indicated by a flashing clock with NO rays as shown here... 
- 6) Press "HOUR" and "MINUTE" to set the "timer off" time. Then press "SET" to confirm and activate the timer. (To deactivate the timer, press "TIMER" again).
- 7) The LCD should show the timer icon during "current time" mode, showing that the lamp is in off state as right, and ready to turn on at set time. 
- 8) When the current time meets the "timer on" time, the lamp will turn on and the icon will change to as right to indicate the lamp status. 

H. DELAY OFF


- 1) When pressed the first time, it will display the remaining "delay off" time set before. Then the time will increment by 15 minutes when the button is pressed if the delay time is below one hour. If longer than one hour, the delay time will increment by 30 minutes every time the button is pressed.
- 2) The maximum "off time" setting is 2:00. The time will reset to zero if pressed again after reaching maximum.
- 3) Press "SET" to confirm and activate "delay off" and display current time again. The LCD should show the icon to the right. 

I. SECURITY

- 1) Only "SECURITY" button can activate and deactivate security mode.
- 2) The lamp will turn on and off randomly when set, (based on a 30 days on-off timetable agreed before.)
- 3) If security mode is activated when setting current time, the time will automatically be set to the time displayed on the LCD.
- 4) If the unit is unplugged or power is cut off when the unit is in security mode, the unit will remain in security mode when power resumes. Thus the LCD will not flash and the clock will start to run from "PM 12:00" right away.
- 5) The icon at right indicates security mode is activated. 

SMART LAMP

assembly and care instructions

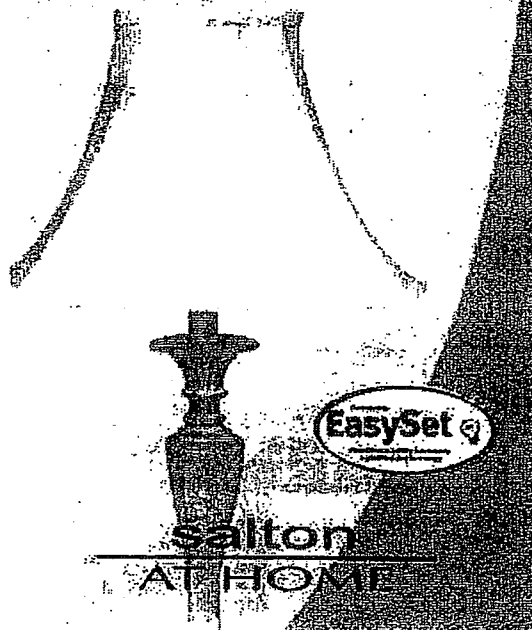


Limited Warranty

To ensure your satisfaction, Salton at Home lamps are covered by a limited warranty, for manufacturing defects only. A two-year limited warranty applies to the base and six-month limited warranty applies to the shade. The warranty commences from the date of purchase, and proof of purchase is required for claims. Failure to follow the Care Instructions and product-warning labels will void warranty.

salton
AT HOME

1955 W. Field Court
Lake Forest, IL 60045

Assembly Instructions

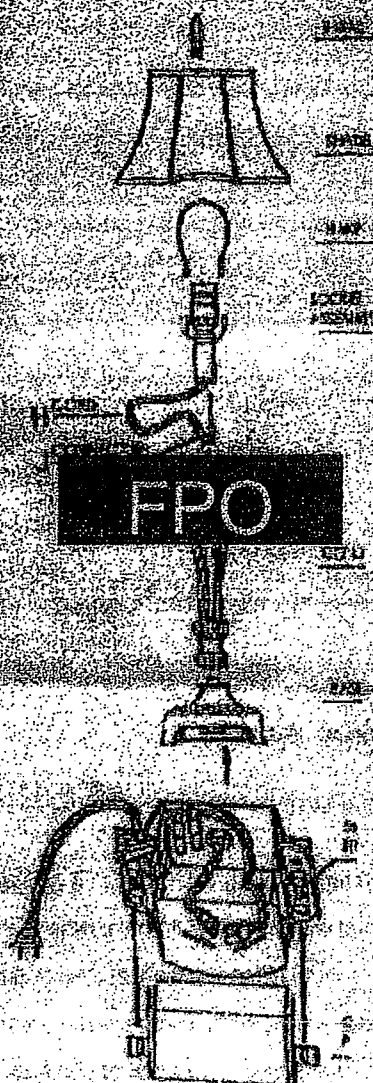

(If your lamp is assembled, skip to step 5)

- 1) Put cord (H) through the pipe on the column (E). Then screw together the socket assembly (D) and the column (E).
- 2) Again put the cord (H) through the pipe on the base (F). Then screw together the base (F) and the column (E).
- 3) Snap together the cord connector (J) on the cord (H) and the cord connector inside of the base (F).
- 4) Snap in the cover plate (K) on the switch holder (L). Make sure all the wires and wire connectors are covered under the cover plate.
- 5) Place the shade (B) on the harp (C) and screw the finial (A) onto the harp (C) to secure the shade (B).

Care Instructions

With the proper care, your Smart lamp will give you many years of enjoyment and comfort. Each lamp is carefully lacquered to preserve and protect the finish. To maintain this elegant finish, simply wipe your lamp with a clean soft cloth. Never use any polish, abrasives or chemicals. When using furniture polish or carpet and floor cleaners, lamp should be removed until the surface is dry.

Important Safety Instructions

This portable lamp has a polarized plug (one blade is wider than the other) as a safety feature to reduce the risk of electrical shock. This plug will fit in a polarized outlet only one way. If the plug does not fit fully in the outlet, reverse the plug. If it still does not fit, contact a qualified electrician. Never use with an extension cord unless plug can be fully inserted. Do not attempt to defeat this safety feature.

Made in China

7 1/2" harp

How EasySet Works

- A. When plugged in for the first time, the default settings are:
 - 1) the unit will be in "standby" mode (not on);
 - 2) the clock will be in "set current time" mode with "PM 12:00" flashing. (If security mode was activated in last use, the time will automatically set to PM 12:00);
 - 3) the lamp intensity will be at preset level.
- B. Backlight will turn on once any button is pressed. The backlight remains on for 5 more seconds after the key is released.
- C. When the unit is in "standby" mode, the LED will be on as a power indicator.
- D. While the unit is in "set current time" mode, the LCD flashes and the current time will stop.
- E. The lamp intensity will be automatically stored at the "preset" level after using the "+" and "-" buttons to change the light intensity to the desired level.
- F. To demonstrate the security mode when plugged in for the first time, the LCD should flash with "PM 12:00". Press "SEC" and the unit will enter security demonstration mode. The lamp should turn on then off when PM 12:01 (on), PM 12:02 (off), PM 12:03 (on), PM 12:04 (off), PM 12:05 (on), PM 12:06 (off).

Customer Service

Questions or missing parts?
 Saffon at Home Customer Service at:
 800.919.3101