




innovation for a healthier today and tomorrow

Clean & Pure[®]

Sprayer / Water Filtration System

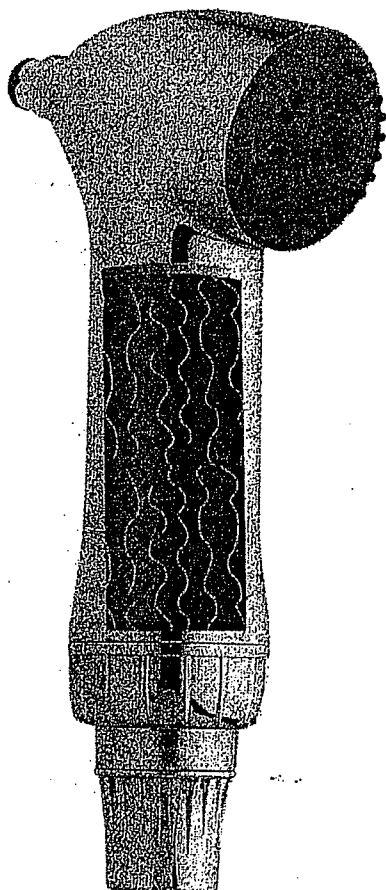

USE AND CARE INFORMATION

Models

WF100B

WF100C

WF100W

PERFORMANCE
DATA SHEET

**SAVE THESE
INSTRUCTIONS**

For Household Use Only

IMPORTANT

- The WF100 Sprayer Filter Dispenser is to be used with cold tap water only; DO NOT use with hot water.
- The WF100 Sprayer/Filter is designed to be used only with municipality treated tap water which is microbiologically safe. It is not designed to purify contaminated water.
- Do not use with water that is microbiologically unsafe or of unknown quality without adequate disinfection before or after the system.
- Information about the quality of your tap water is available from your local water authority. Installation of this system must comply with state and local laws and regulations.

INSTALLATION

The WF100 Sprayer Filter Dispenser is designed to be attached to your existing kitchen sink sprayer attachment hose. Installation is quick and easy; no tools are needed.

1. Carefully unpack WF100 Sprayer Filter Dispenser and any parts.
2. With the water turned off, extend the existing kitchen sink sprayer from the rest position. Unscrew the sprayer nozzle from the sprayer hose.
3. Screw the WF100 Sprayer Filter Dispenser onto the hose threads, tighten by hand. Retract the sprayer hose and allow the WF100 Sprayer Filter Dispenser to sit upright in the sprayer socket.
4. Turn the cold water on, press the F button to purge the WF100 Sprayer Filter Dispenser of air and carbon fines. Allow to flow for two minutes. Turn off the cold water.
5. Check for leaks at the WF100 Sprayer Filter Dispenser to hose connection; Tighten by hand if necessary.

FILTER REPLACEMENT

REMOVAL AND REPLACEMENT OF WF100 FILTER CARTRIDGE.

Filter Replacement is essential for the product to perform as represented. The filter is good for 100 gallons or approximately 3 months depending on water quality in your area.

The Replacement Cartridge for the WF100 is part number FRC100 (individual replacement unit package) or FRC103 (three replacement unit package).

Replacement Filter Cartridges	
Model#	Quantity
FRC100	1
FRC103	3

1. Extend the WF100 from the Sink position.
2. Unscrew the lower ribbed fittings from the WF100 handle; this exposes a tab. Use fingers or tool provided to extract the used cartridge, discard cartridge.
3. Insert a new FRC100 Replacement Cartridge in position.
4. Screw the lower, ribbed fitting onto the WF100 handle. Turn the cold water on and check for leaks; retighten if necessary.
5. Turn the cold water on, press the F button to purge the WF100 Sprayer Filter Dispenser of air and carbon fines. Allow to flow for two minutes. Turn off the cold water.



INSTRUCTIONS FOR USE


INSTRUCTIONS FOR WF100 SPRAY FILTER FEATURES

The WF100 Sprayer Filter Dispenser has the unique ability to both spray water for flushing and rinsing, and also dispense filtered water for drinking and cooking.

The WF100 Sprayer Filter Dispenser is made for use with cold tap water only; DO NOT use with hot water.

GENERAL:

The WF100 Sprayer Filter Dispenser has two buttons, one marked **F** for Filtered and the other marked **S** for Spray (unfiltered). When neither button is pushed, water flow is off. Pushing the **S** button allows the WF100 to spray non-filtered water. Pushing the **F** button dispenses a stream of filtered water.

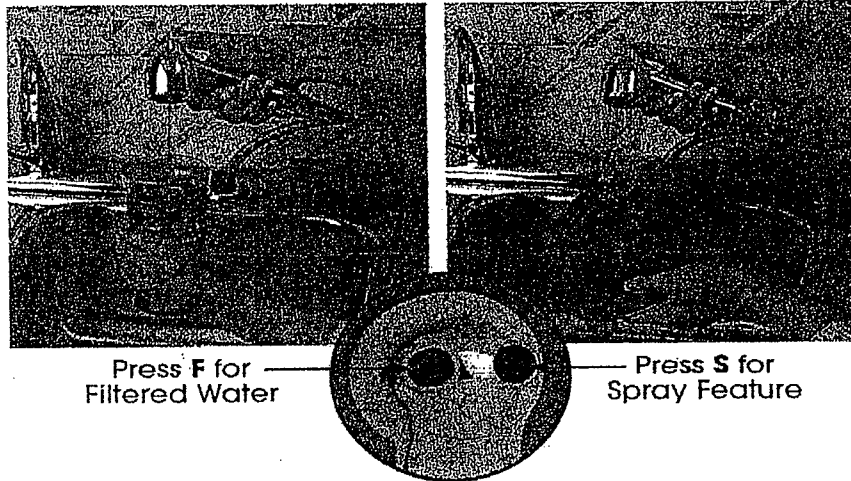

For Filtered water, turn the cold water on, press **F** water button; To dispense filtered water for drinking, cooking, etc. Turn off the cold water.

To Spray non-filtered water, turn the cold water on, press **S** water button to dispense spray water for flushing and rinsing. Turn off the cold water.

CARE AND CLEANING

Maintenance:

The WF100 Sprayer Filter Dispenser has a replaceable filter cartridge. The filter cartridge has a service life of 100 gallons, although it may vary due to water conditions in your area. Replace the cartridge when there is a reduced flow of filtered water from the WF100. There is no limit to the amount of spray water (unfiltered) the WF100 may dispense.

Cleaning:

The WF100 Sprayer Filter Dispenser finish is a high quality chrome plate, brass plate, or white finish. Do not use abrasives such as scouring powders or steel wool pads to clean the surface. A soft sponge with water and a mild dishwashing liquid may be used to clean the exterior surface.

SPECIFICATIONS

- Operating Pressure: 40-100 psig (275-689 kPa)
- Operating Pressure, Max: 100 psig (689 kPa)
- Operating Temperature, Max: 100°F (38°C)
- Rated Service Flow: 0.5 gpm (1.9 lpm)
- Rated Filter Capacity: Up to 100 gals (380 liters)
- Contaminant Reductions: (When Filter button is operated.)
 - Chlorine Taste and Odor: > 95%
 - Lead: > 98%

TEST INFORMATION



System Tested and Certified by NSF International against ANSI/NSF Standard 42 for the reduction of Chlorine Taste and Odor; and to Standard 53 for the reduction of Lead.

LIMITED WARRANTY

Salton, Inc. warrants that the products delivered will be free from any defects in workmanship or materials for a period of 90 days from the date of purchase. Further, the warranty provided herein applies, only when used within the products specifications and service life, from the date of installation or 3 years from the date of manufacture whichever occurs first, beyond which Salton is absolved of any and all liability for any use of the product. In the event of a defect or non-conformity, buyer shall promptly notify Salton in writing, supplying proof-of-purchase dates, installation dates, and will protect and retain the products for investigation, or Salton is absolved of any and all liability from any use of the product. If within 90 days from the date of purchase, the product proves to be defective for any reason, return it postpaid to Salton at the address below, for repair or replacement at no charge. This product warranty covers only the original consumer purchaser of the product.

This warranty does not apply to any product the exterior of which has been damaged or defaced, which has been subjected to commercial usage, misuse, abnormal service or maintenance neglect, or which has been altered or modified in design or construction.

The buyer and/or user accept all responsibility and liability for the use of this product. Salton's responsibility is limited to the repair or replacement of defective merchandise that fails within the specified warranty period. Salton's liability for special, incidental or consequential damages is expressly disclaimed. There are no other warranties, either of merchantability or fitness, either expressed or implied. DETERMINATION OF SUITABILITY OF PRODUCT FOR USES AND APPLICATIONS CONTEMPLATED BY BUYER SHALL BE THE SOLE RESPONSIBILITY OF BUYER. USE OF THIS PRODUCT CONSTITUTES BUYER'S ACCEPTANCE OF THIS LIMITED LIABILITY.

WARNING: Filter must be replaced every 100 gallons or approximately every 3 months. Failure to replace this unit may result in decreased product effectiveness.

Salton, Inc.
708 South Missouri Street
Columbia, MO 65205-7366
1 (800) 233-9054

© 2003 Salton, Inc.
P/N 61423
Sprayer made in Taiwan
Filter made in U.S.A.